(19) World Intellectual Property Organization International Bureau





(43) International Publication Date 22 March 2001 (22.03.2001)

PCT

(10) International Publication Number WO 01/20125 A1

Wing, Bucklerburn Steading, Peterculter AB14 0NP (GB).

(72) Inventor: METCALFE, Paul, David [GB/GB]; North

(74) Agents: MCCALLUM, William, Potter et al.; Cruikshank & Fairweather, 19 Royal Exchange Square, Glasgow

(84) Designated States (regional): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC,

(81) Designated States (national): AU, CA, NO.

(51) International Patent Classification⁷: E2

E21B 43/10,

(21) International Application Number: PCT/GB00/03531

(22) International Filing Date:

14 September 2000 (14.09.2000)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

9921557.6

14 September 1999 (14.09.1999) GB

lish

Published:

(71) Applicant and

G1 3AE (GB).


NL, PT, SE).

With international search report.

(71) Applicant: WEATHERFORD/LAMB, INC. [US/US]; c/o CSC - The United States Corporation Company, 1013 Centre Road, Wilmington, DE 19805 (US).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: EXPANDABLE TUBING



(57) Abstract: Expandable tubing (20) has a tubing wall (22) comprising a plurality of deformable tubular structures (24). The structures (24) have permeable walls and containing a filter medium (28) such that fluid may flow through the structures (24) and the filter medium (28) and thus through the tubing wall (22).

WO 01/20125 A1

EXPANDABLE TUBING

1

This invention relates to a downhole apparatus, and in particular but not exclusively to forms of expandable tubing and to forms of expandable filters and filter supports.

W093/25800 (Shell Internationale Research Maatschappij
B.V.) describes a method of completing an uncased section
of borehole. A slotted liner provided with overlapping
longitudinal slots is fixed in the borehole and a tapering
expansion mandrel is pushed or pulled through the liner.

The liner is expanded by the mandrel to support the
adjacent borehole wall.

WO97/17524 (Shell Internationale Research Maatschappij B.V.) describes a deformable well screen and method for its installation utilising two sections of concentric slotted tubing, such as described in WO 93/25800, with a series of circumferentially scaled filter segments therebetween. The screen is expanded by pushing or pulling an expansion mandrel through the screen.

15

The expansion mechanism of these arrangements is such
that there is an axial retraction of the tubing on radial
expansion. This not only creates difficulties in
accurately locating and securing the ends of the tubing in
a bore relative to adjacent tubing sections, but also may

5

10

15

20

25

result in undesirable relative axial movement between the tubing and other elements mounted thereon, such as filter segments. Further, in such a filter arrangement, the radial expansion forces which must be applied to the outer section of expandable tubing are transferred via the filter medium or media located between the tubing sections; this limits the range of media which may be utilised in such arrangements to filter materials and configurations which will withstand significant compressive forces, in addition to the significant shear forces which the filter material will experience during expansion of the tubing sections.

2

It is among the objectives of embodiments of aspects of the invention to provide alternative expandable tubing forms, including expandable filters and filter supports, which overcome such disadvantages.

According to the present invention there is provided expandable tubing having a tubing wall comprising a plurality of deformable tubular structures, at least some of the structures having permeable walls and containing a filter medium such that fluid may flow through the structures and thus through the tubing wall.

This aspect of the invention is useful as a downhole filter or sand screen, the deformable tubular structures forming the wall of the tubing facilitating expansion of the tubing, and the tubular structures potentially serving as filter elements and also accommodating a selected filter

5

10

15

20

25

medium or media. Also, the use of the tubular structures to accommodate or facilitate expansion assists in avoiding the longitudinal contraction which tends to occur on radial expansion of tubing defining overlapping longitudinally extending slots.

3

The tubular structures may extend longitudinally, helically, or in be positioned in any appropriate orientation. A substantially axial orientation may offer more straightforward assembly and resistance to bending, however for other applications a helical arrangement may offer greater flexibility and resistance to radial compressive forces.

The tubular structures may be of any material, structure or form which provides the desired degree of deformability, permeability and the desired degree of structural strength. In one embodiment, the tubular structures are of sintered ductile metal, while in other embodiments drilled or slotted tubes may be utilised. sintered metal, or some other porous material of similar structure, is utilised to form the tubular structures, the pores of the material may be initially filled or occupied by another material to create an impermeable structure. This filling material may be subsequently removed, for example by application of an appropriate solvent, which may be produced fluid, or exposure to elevated temperature as experienced in deeper bores.

5

10

15

20

25

4

The tubular structures may be connected to one another by any appropriate method, for example metal structures may be welded or brazed to one another, or the structures may be retained between two expandable sleeves or tubes.

In other embodiments, the tubular structures may be defined by appropriately shaped sheets or elements, or unitary structures, for example two corrugated sheets or tubes which have been welded or otherwise secured together, or by extruding or otherwise forming the tubing wall in a form which incorporates tubular structures. These embodiments may form other aspects of the invention, in which the tubular structures are impermeable, that is fluid is prevented from flowing through the tubing wall, in one or both of the unexpanded and expanded configurations.

The tubular structures may feature substantially continuous walls, or may have discontinuities therein, for example the tubular structures may be substantially C-shaped.

The tubular structures may accommodate a filter medium of media, such as woven wire, porous foam, wire mesh or wire wool, or indeed any medium presently utilised as a filter and which could be located within a tubular structure and withstand the change in shape experienced by the tubular structures during expansion. Alternatively or in addition, the tubular structures may be lined with a filter media in the form of a flexible or deformable porous

5

10

material.

The aperture or pore size defined by the tubular structures or the filter media therein may be selected as appropriate, depending on the intended application of the tubing: the tubing may provide a relatively coarse filter, for preventing passage of relatively large solids, or may be such that passage of liquid or very fine solids is prevented or restricted, and only passage of gas is permitted, by use of a tubular structure-lining material such an expanded PTFE, as produced under the Gore-Tex trade mark by W.L. Gore & Associates.

These and other aspects of the present invention will now be described, by way of example, with reference to the accompanying drawings, in which:

15 Figure 1 is a diagrammatic representation of an expandable tubing in accordance with an aspect of the present invention;

Figure 2 shows the tubing of Figure 1 following expansion;

Figure 3 is a diagrammatic representation of part of a wall of an expandable tubing in accordance with a further aspect of the present invention;

Figure 4 shows the tubing of Figure 3 following expansion;

25 Figure 5 illustrates an expandable tubing in accordance with a still further aspect of the present

invention; and

5

10

15

20

25

Figures 6 to 9 are diagrammatic representations of walls of expandable tubings in accordance with further aspects of the present invention.

6

Reference is first made to Figures 1 and 2 of the drawings, which illustrate a form of expandable tubing 10, in accordance with an aspect of the present invention, and which may be utilised as or as part of a sand screen or other downhole filter arrangement. Typically, the tubing will be run into a bore in the "unexpanded" form as illustrated in Figure 1, anchored in the bore, and then expanded to the larger diameter expanded form as illustrated in Figure 2, with a degree of expansion in excess of 30% being achievable.

The tubing wall 12 comprises a plurality of axially extending tubular structures in the form of small diameter tubes 14 formed of sintered metal. The tubes 14 provide a porous sand filtering media.

Expansion of the tubing 10 is primarily accommodated by a flattening of the tubes 14, and the expanded tubing is shown in Figure 2 of the drawings. This expansion may be achieved by means of a conventional expanding cone or mandrel, which is pushed or pulled through the tubing 10. As the tubes 14 deform there will also be some deformation and variation in the sizes of the pores, apertures and passages in the walls of the tubes, however pore size

5

10

15

20

25

7

variation may be predicted to some extent, and in any event it is difficult to form a porous sintered metal product with closely controlled pore size.

Reference is now made to Figures 3 and 4 of the which illustrate part alternative drawings, of an expandable tubing 20, in which the tubing wall 22 comprises a plurality of solid tubes 24 having holes 26 drilled The tubes 24 accommodate filter media 28 which may be in the form of deformable woven wire, porous foam, wire mesh or wire wool. On expansion of the tubing, to the form illustrated in Figure 4, the aperture or pore size of the filter media 28 will not tend to change (although the filter media may be subject to some compaction), providing a greater degree of predictability than the tubing 10 described above.

Reference is now made to Figure 5 which illustrates a similar form of expandable tubing 40 to that shown in Figure 1, except that the pores 42 of the material forming the tube walls are initially filled by another removable material 44 thus (temporarily) creating an impermeable structure. This filling material 44 may be subsequently dissolved, or removed by exposure to elevated temperatures.

Figure 6 illustrates a further alternative embodiment of the present invention in which the tubular structures 52 are retained between two expandable sleeves 54, 55

Figure 7 illustrates a wall section 60 of tubing 60 of

5

10

15

20

a further embodiment of the present invention wherein the tubular structures 62 are defined by inner and outer corrugated sheets 64, 66. These sheets 64, 66 are welded together at 68.

8

Reference is now made to Figure 8, which shows a wall section of tubing 70 of another embodiment of the invention, which tubing features an alternative form of tubular structures 72 to define the bounding walls of the expandable tubing 70. In this particular example, the tubular structures 72 do not have continuous walls, being substantially C-shaped.

Figure 9 illustrates a wall section of tubing 80 of a further embodiment of the invention. In this embodiment, the porous tubular structures 82 are lined with a filter membrane 84. In this example the membrane 84 is a flexible porous material, in particular expanded PTFE, as sold under the GORE-TEX trade mark, and is impervious to selected liquids, and only permits passage of gas therethrough.

It will be apparent to those of the skill in the art that the above-described embodiments are merely exemplary of the various aspects of the present invention, and that various modifications and improvements may be made thereto without departing from the scope of the present invention.

. 9

CLAIMS

- 1. Expandable tubing having a tubing wall comprising a plurality of deformable tubular structures, at least some of the structures having permeable walls and containing a filter medium such that fluid may flow through the structures and the filter medium and thus through the tubing wall.
- 2. The tubing of claim 1, wherein the tubing is adapted to prevent flow of particulates through the tubing wall.
- 10 3. The tubing of claim 1 or 2, wherein the tubular structures extend longitudinally of the tubing.
 - 4. The tubing of any of the preceding claims, wherein the tubular structures are of sintered ductile metal.
- 5. The tubing of any of the preceding claims, wherein the tubular structures are of porous material and the pores of the material are initially filled by another removable material to create an initially impermeable structure.
 - 6. The tubing of any of claims 1, 2 or 3, wherein the tubular structures are apertured tubes.

7. The tubing of any of the preceding claims, wherein the tubular structures are retained between two expandable sleeves.

- 5 8. The tubing of any of claims 1 to 6, wherein the tubular structures are defined by corrugated members.
 - 9. The tubing of any of the preceding claims, wherein the tubular structures have substantially continuous walls.
- 10. The tubing of any of claim 1 to 8, wherein the tubular structures have discontinuities therein.
 - 11. The tubing of claim 10, wherein the tubular structures are substantially C-shaped.
 - 12. The tubing of any of the preceding claims, wherein the tubular structures are lined with a filter medium.
- 13. The tubing of claim 12, wherein the filter medium lining is a flexible porous material.
 - 14. The tubing of claim 13, wherein the flexible porous material is adapted to prevent passage of selected liquids therethrough but to permit passage of gas therethrough.

5

10


15


15. Expandable tubing having a tubing wall comprising a plurality of deformable tubular structures, at least some of the structures having porous walls of sintered ductile material such that fluid may flow through the structures and through the tubing wall.


- 16. Expandable tubing having a tubing wall comprising a plurality of deformable tubular structures, at least some of the structures having walls of porous material initially filled by another removable material to create an initially impermeable structure, such that upon removal of said removable material fluid may flow through the structures and thus through the tubing wall.
 - 17. Expandable downhole tubing having a tubing wall comprising a plurality of deformable tubular structures retained between two expandable sleeves.
 - 18. Expandable downhole tubing having a tubing wall comprising a plurality of deformable tubular structures defined by a plurality of corrugated members.
- 19. The tubing of claim 18, wherein at least some of the structures have permeable walls such that fluid may flow through the structures and thus through the tubing wall.

20. Expandable downhole tubing having a tubing wall comprising a plurality of deformable tubular structures, the tubular structures having discontinuities therein.

- 21. The tubing of claim 20, wherein at least some of the structures have permeable walls such that fluid may flow through the structures and thus through the tubing wall.
 - 22. The tubing of claim 20 or 21, wherein the tubular structures are substantially C-shaped.
- 23. Expandable tubing having a tubing wall comprising a plurality of deformable tubular structures, at least some of the structures having permeable walls lined with a filter medium such that fluid may flow through the structures and the filter medium and thus through the tubing wall.
- 15 24. The tubing of claim 23, wherein the filter medium lining is a flexible porous material.
 - 25. The tubing of claim 24, wherein the flexible porous material is a membrane adapted to prevent passage of selected liquids and permit passage of gas therethrough.

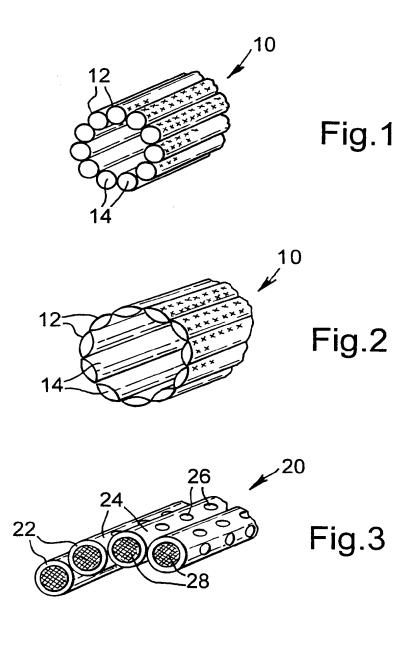

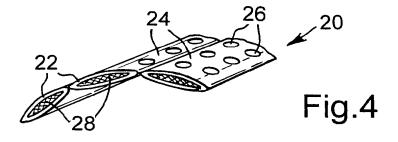

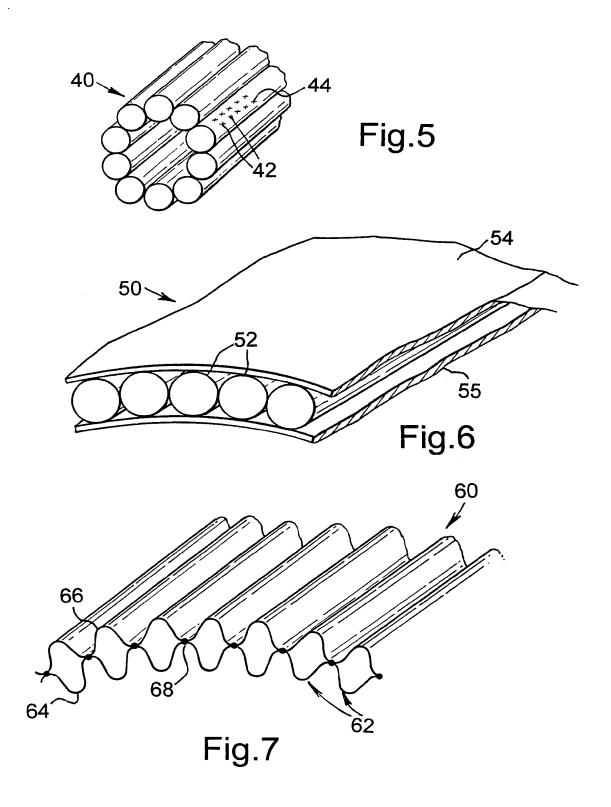

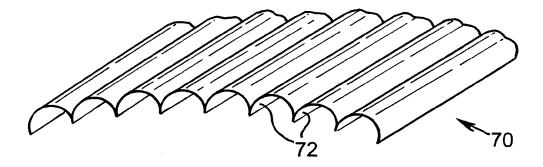


Fig.8

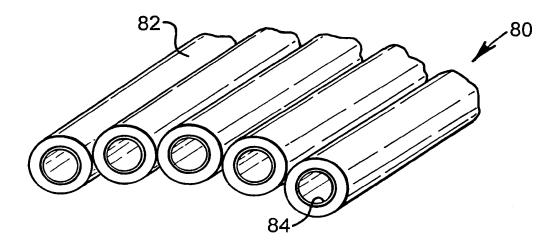


Fig.9

INTERNATIONAL SEARCH REPORT

Inter onal Application No PCT/GB 00/03531

		/GB 00/03531			
a. classii IPC 7	FICATION OF SUBJECT MATTER E21B43/10 E21B43/08				
	o International Patent Classification (IPC) or to both national clas	sification and IPC			
	SEARCHED cumentation searched (classification system followed by classif	ication symbols)	V - W - W - W - W - W - W - W - W - W -		
IPC 7	E21B F16L				
Documentat	tion searched other than minimum documentation to the extent the	nat such documents are included in	the fields searched		
Documenta	ion searched only than minimum decumentation to the extent in	iar such documents are included in	me neras searchea		
Electronic d	lata base consulted during the international search (name of dat	a base and, where practical, search	terms used)		
EPO-In	ternal				
C. DOCUM	ENTS CONSIDERED TO BE RELEVANT				
Category °	Citation of document, with indication, where appropriate, of the	e relevant passages	Relevant to claim No.		
Ρ,Χ	EP 0 952 305 A (SHELL INT RESE, 27 October 1999 (1999-10-27) column 4, line 5 - line 7 column 4, line 19 - line 23	15,20,21			
	column 6, line 22 - line 32				
X	EP 0 937 861 A (HALLIBURTON EN INC) 25 August 1999 (1999-08-2 figure 7		18		
Α	US 3 353 599 A (GULF OIL CO) 21 November 1967 (1967-11-21) column 4, line 71 -column 5, l	ine 10	1-25		
A	FR 721 430 A (KAPFERER HENRI) 3 March 1932 (1932-03-03) page 2, line 14 - line 32		1–25		
		-/			
X Furt	ther documents are listed in the continuation of box C.	χ Patent family member	rs are listed in annex.		
° Special ca	ategories of cited documents:	"T" later document published a			
"A" docum consi	nent defining the general state of the art which is not dered to be of particular relevance		conflict with the application but inciple or theory underlying the		
filing		"X" document of particular rele	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to		
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)		"Y" document of particular rele	involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention		
"O" docum	on or other special reason (as specified) nent referring to an oral disclosure, use, exhibition or rineans	document is combined wit	nvolve an inventive step when the thone or more other such docu- being obvious to a person skilled		
"P" docum	means ment published prior to the international filing date but than the priority date claimed	in the art. *&' document member of the s	,		
	e actual completion of the international search	Date of mailing of the intel			
1	16 November 2000	24/11/2000	24/11/2000		
Name and	mailing address of the ISA	Authorized officer			
	European Patent Office, P.B. 5818 Patentlaan 2 NL – 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Garrido Gar	Garrido Garcia, M		

INTERNATIONAL SEARCH REPORT

Inter onal Application No
PCT/GB 00/03531

etion) DOCUMENTS CONSIDERED TO BE RELEVANT	Delayant to daim No
ाबाजा ज वज्यामенा, with indication,where appropriate, or the relevant passages	Relevant to claim No.
US 5 901 789 A (KENTER CORNELIS JAN ET AL) 11 May 1999 (1999-05-11) column 4, line 56 - line 59 figures 1,2	1-25
FR 2 326 229 A (GRIHANGNE ANDRE) 29 April 1977 (1977-04-29) figures 1-12	1-25
	US 5 901 789 A (KENTER CORNELIS JAN ET AL) 11 May 1999 (1999-05-11) column 4, line 56 - line 59 figures 1,2 FR 2 326 229 A (GRIHANGNE ANDRE) 29 April 1977 (1977-04-29)

INTERNATIONAL SEARCH REPORT

Information on patent family members

Inter onal Application No
PCT/GB 00/03531

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
EP 09523	05 A	27-10-1999	AU WO	4361099 A 9956000 A	16-11-1999 04-11-1999
EP 09378	61 A	25-08-1999	BR NO	9900483 A 990784 A	18-01-2000 25-08-1999
US 33535	99 A	21-11-1967	NONE		
FR 72143	0 A		NONE		
US 59017	'89 A	11-05-1999	AU AU BR EA WO EP JP NO NZ US	710745 B 7568096 A 9611456 A 980433 A 9717524 A 0859902 A 11514712 T 982087 A 322015 A 6012522 A	30-09-1999 29-05-1997 17-02-1999 29-10-1998 15-05-1997 26-08-1998 14-12-1999 07-07-1998 28-10-1999 11-01-2000
FR 23262	229 A	29-04-1977	NONE		